

Water sprinkler pole

WATER



1930
1931



1931-C

Sprinklers

Valve time

Main valve




Valve time



Main valve



Sprinklers

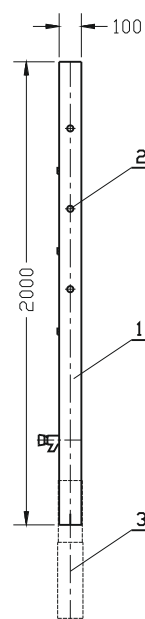


Product description (standard execution):

- Aluminum profiles 100x100 - see: 1930
- Aluminum profiles 120x120 - see: 1931
- Valve time aluminum profiles 100x100 - see: 1931-C
- Aluminum profiles construction 100x100 or 120x120
- Steel zinc coated footing
- Shut-off ball valve 1/2 "
- Height 2000 [mm]
- 9 sprinkling nozzle
- Powder painting
- **Nozzle capacity approx. 2.5 l/h**

No.	Part	Standard execution
1	Construction	Profil aluminium EN 755-2
2	Sprinklers	Catalogue producer
3	Footing*	Steel* EN ISO 1461 B - Concrete* F - Substructure*

Application:

For use in open spaces like: parks, playgrounds, street runs for body cooling



Futing concrete



Futing substructure

We reserve the rights to modify the production program and the given data without separate notices due to the permanent company development