


Flanged bend Type FFK

PN10
PN16
WATER


Flanged bend Type FFK 9209

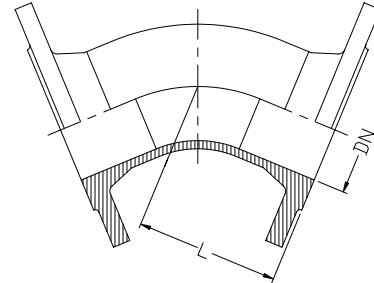

Product description (standard execution):

- Made of ductile cast iron EN-GJS 500-7
- UV resistant epoxy coating, to EN 14901
- Flange connection and connector according to EN 1092-2 (DIN 2501), pressure PN10 PN16
- Product according to EN 545
- Hygienic certificate PZH for potable water
- Working pressure PN10 / PN16

Application:


In water supply systems, potable water and other chemically inert liquids

DN	L	Weight	L	Weight	L	Weight	L	Weight
[mm]	[mm]	[kg]	[mm]	[kg]	[mm]	[kg]	[mm]	[kg]
Angle	11,25°		22,5°		30°		45°	
80	130	9	130	9	130	10	130	10
100	140	11,5	140	11,5	140	12	140	12
150	160	18,5	160	18,5	160	20	160	20
200	180	28	180	28	180	29	180	29
250	210	45	210	45	210	45	350	62
300	255	60	255	60	255	60	400	77
400	205	75,1	239	81,2	240	81	324	95,2

Socket bend Type MMK

PN10
PN16
WATER


Socket bend MMK 9210

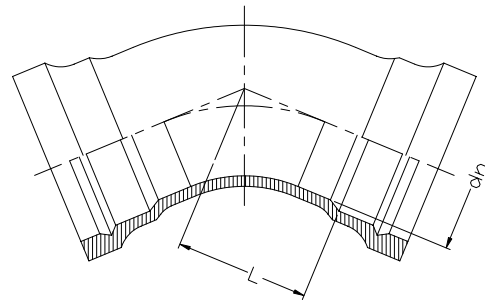

Product description (standard execution):

- Made of ductile cast iron EN-GJS 500-7
- UV resistant epoxy coating, to EN 14901
- Product according to EN 545
- Hygienic certificate PZH for potable water
- Working pressure PN10 / PN16

Application:

In water supply systems, potable water and other chemically inert liquids

dn	L	Weight	L	Weight	L	Weight	L	Weight
[mm]	[mm]	[kg]	[mm]	[kg]	[mm]	[kg]	[mm]	[kg]
kat	11,25°		22,5°		30°		45°	
80	30	6,5	40	7	50	7	60	7,5
100	30	8	40	9	55	9	65	9
150	55	14	55	14	75	15	85	16
200	40	20	65	21	80	22	90	25
250	55	27,5	80	30	80	32	110	36
300	55	36,5	85	40,5	110	43	150	48
400	65	75	110	86	130	87	185	95
500	75	95	130	102	180	115	240	132
600	85	138	150	151	215	170	285	245

We reserve the rights to modify the production program and the given data without separate notices due to the permanent company development