


## Cast iron spigot flange Type F

**PN10**  
**PN16**
**WATER**


Cast iron spigot flange Type F 9201

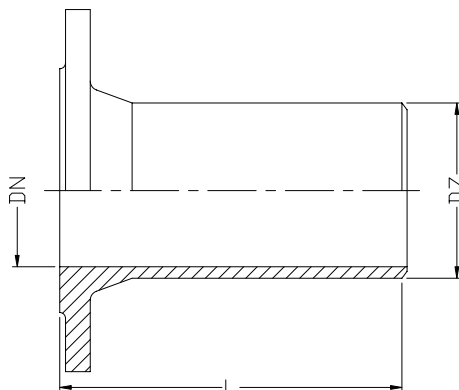

| DN  | D <sub>z</sub> | L    | Weight |
|-----|----------------|------|--------|
|     | [mm]           |      | [kg]   |
| 50  | 66             | 340  | 6,9    |
| 65  | 82             | 345  | 7,5    |
| 80  | 98             | 350  | 8,5    |
| 80  | 98             | 1000 | 19,6   |
| 100 | 118            | 360  | 11     |
| 100 | 118            | 1000 | 26,2   |
| 150 | 170            | 380  | 18     |
| 150 | 170            | 1000 | 54,7   |
| 200 | 222            | 400  | 24,5   |
| 200 | 222            | 1000 | 54,7   |
| 250 | 274            | 420  | 40     |
| 300 | 326            | 440  | 52     |
| 400 | 429            | 480  | 86     |

### Product description (standard execution):

- Made of ductile cast iron EN-GJS 500-7
- UV resistant epoxy coating EN 14901
- Flange connection according to EN 1092-2 (DIN 2501), pressure PN10, PN16
- Product according to EN 545
- Hygienic certificate PZH for drinking water
- Working pressure PN10 / PN16


### Application:

The water supply system and sewage item 9201 for use with cast iron pipes

## Cast iron flanged elbow with stand Type N

**PN10**  
**PN16**
**WATER**


Cast iron spigot flange Type 9202

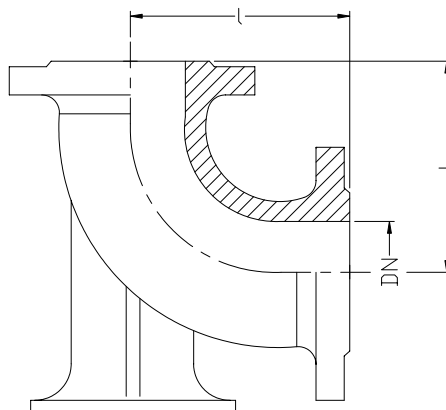

| DN  | I    | Weight |
|-----|------|--------|
|     | [mm] | [kg]   |
| 80  | 165  | 13     |
| 100 | 180  | 17     |
| 150 | 220  | 29     |
| 200 | 260  | 46     |
| 250 | 350  | 73     |
| 300 | 400  | 104    |
| 400 | 500  | 177    |
| 500 | 600  | 281    |
| 600 | 700  | 425    |
| 800 | 900  | 860    |

### Product description (standard execution):

- Made of ductile cast iron EN-GJS 500-7
- UV resistant epoxy coating EN 14901
- Flange connection according to EN 1092-2 (DIN 2501), pressure PN10, PN16
- Product according to EN 545
- Hygienic certificate PZH for potable water
- Working pressure PN10 / PN16

### Application:

In water supply systems, potable water and other chemically inert liquids