


Flanged and socket pieces Type E

PN10
PN16
WATER


Flange and socket pieces E 9217

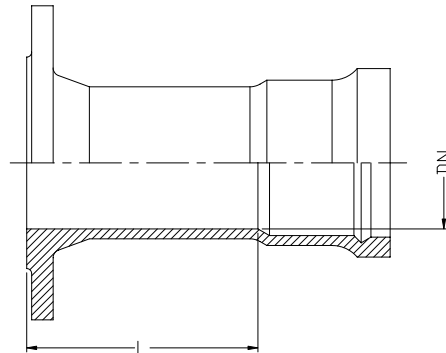

Product description (standard execution):

- Made of ductile cast iron EN-GJS 500-7
- UV resistant epoxy coating EN 14901
- Flange connection according to EN 1092-2 (DIN 2501), pressure PN10, PN16
- Product according to EN 545
- Hygienic certificate PZH for potable water
- Working pressure PN10 / PN16

Application:


In water supply systems, potable water and other chemically inert liquids

DN	L	Weight
	[mm]	[kg]
80	130	9
100	130	11
125	135	15
150	135	18
200	140	24
250	145	35
300	150	45
400	160	67
500	170	82
600	180	110
800	200	210
1000	220	-
1200	240	-

Flanged cross Type TT

PN10
PN16
WATER


Flanged cross type CF 9218

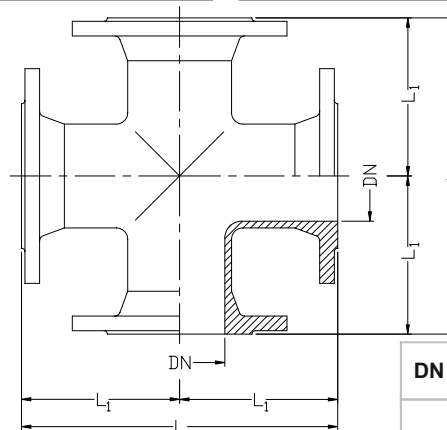

Product description (standard execution):

- Made of ductile cast iron EN-GJS 500-7
- UV resistant epoxy coating EN 14901
- Flange connection according to EN 1092-2 (DIN 2501), pressure PN10, PN16
- Product according to EN 545
- Hygienic certificate PZH for potable water
- Working pressure PN10 / PN16

Application:

In water supply systems, potable water and other chemically inert liquids

DN	L	L ₁	Weight
	[mm]		[kg]
80	330	165	22
100	360	180	27
150	440	220	50
200	520	260	80
250	700	350	104
300	800	400	145
400	900	450	215
500	1000	500	305
600	1100	550	420

We reserve the rights to modify the production program and the given data without separate notices due to the permanent company development