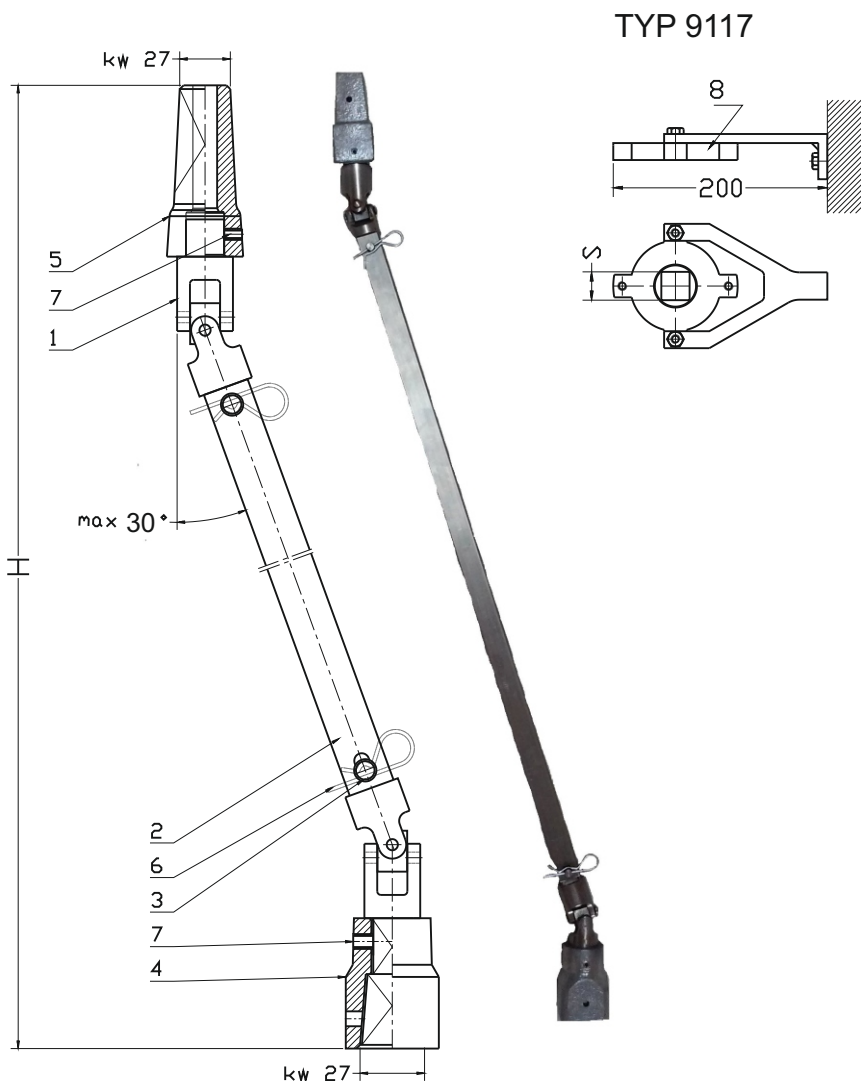


**Rigid extension spindle
with Cardan joint**
**PN10
PN16**
WATER
SEWAGE
GAS


No.	Part	Standard execution
1	Cardan joint	Stainless Steel 1,4301 EN 10027-2
2	Spindle	Stainless Steel 1,4301 EN 10027-2
3	Pin	Stainless Steel 1,4301 EN 10027-2
4	Coupling	Ductile cast iron EN-GJS 400-15 EN 1560
5	Cap	Ductile cast iron EN-GJS 400-15 EN 1560
6	Cotter pin	Stainless Steel 1,4021 EN 10027-2
7	Spring-type straight pin	Stainless Steel 1,4301 EN 10027-2
8*	Rigid extension spindle stabilizer	Stainless Steel 1,4301 EN 10027-2
* - option		

Product description (standard execution):

- Permitted max vertical axis deviation to 30°
- Spindle and cardan joints made of stainless steel
- Motion compensation to 10 [mm]
- Standard height H 1000 [mm] (other executions)
- Parts of iron protected against corrosion coating of zinc.

Application:

For manual or mechanical control valve located axially

Test control:

Directly on the valve in an upright position

DN	S	H	Max. steering Moments
[mm]			[Nm]
40-300	25	1000	250
350-700	30	1000	500

We reserve the rights to modify the production program and the given data without separate notices due to the permanent company development