


Flanged concentric reducer Type FFR

PN10
PN16

WATER

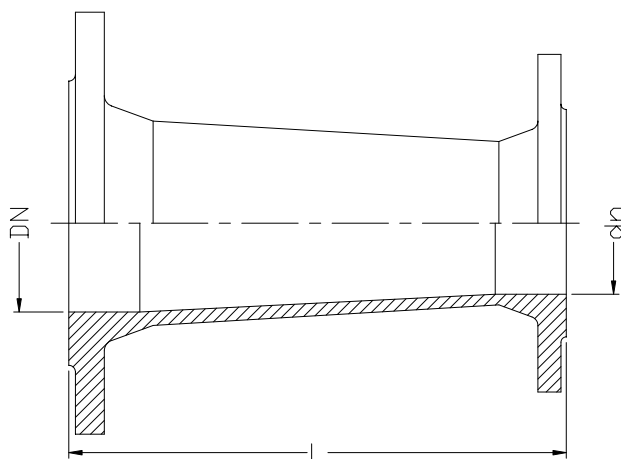

DN	dn	L	Weight	DN	dn	L	Weight
	[mm]		[kg]		[mm]		[kg]
50	40	150	5,9	250	150	300	33
65	50	200	6,9	250	200	300	29,5
80	40	200	8	300	100	300	31,3
80	50	125/200	8,4	300	150	300	36,7
80	65	200	8,8	300	200	300	31,3
100	50	200	9,4	300	1500	200	36,7
100	65	200	9,8	300	200	300	51
100	80	200	10,2	300	250	300	50
125	80	200	14	350	250	300	51
125	100	200	11,2	350	300	300	54
150	50	200	14,2	400	200	300	61
150	80	200	14,6	400	250	300	66
150	80	300	16,5	400	300	300	73
150	100	200	14,8	400	350	300	85
150	100	300	16,8	500	250	600	101
150	125	200	16	500	300	600	143
200	50	300	22,2	500	350	600	138
200	80	300	22,5	500	400	600	162
200	100	300	23	600	300	600	132
200	125	300	23,7	600	400	600	218
200	150	300	23,7	600	500	600	238
250	80	300	27,5	800	600	600	312
250	100	300	28,4				

Product description (standard execution):

- Made of ductile cast iron EN-GJS 500-7
- UV resistant epoxy coating, EN 14901
- Flange connection according to EN 1092-2 (DIN 2501), pressure PN10, PN16
- Product according to EN 545
- Hygienic certificate PZH for potable water
- Working pressure PN10 / PN16

Application:

In water supply systems, potable water and other chemically inert liquids