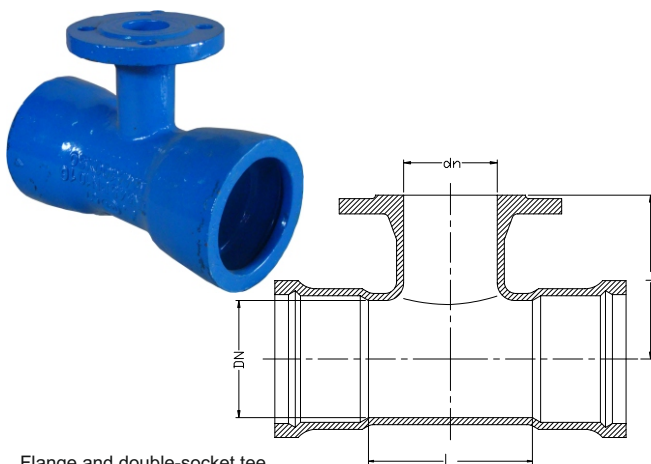


Flange and double-socket tee connector MMA

PN10
PN16
WATER


Flange and double-socket tee
connector MMA 9205

Product description (standard execution):


- Made of ductile cast iron EN-GJS 500-7
- UV resistant epoxy coating EN 14901
- Flange connection according to EN 1092-2 (DIN 2501), pressure PN10, PN16
- Product according to EN 545
- Hygienic certificate PZH for potable water
- Working pressure PN10 / PN16

Application:

In water supply systems, potable water and other chemically inert liquids

DN	dn	L	L ₁	Weight	DN	dn	L	L ₁	Weight
[mm]				[kg]	[mm]				[kg]
80	50	155	155	12	300	100	205	300	50
80	80	170	165	13	300	150	260	310	56
100	50	155	155	13	300	200	320	320	65
100	80	170	175	15	300	300	435	340	86
100	100	190	180	16	400	80	190	355	85
150	50	160	160	19	400	100	210	360	87
150	80	170	205	21	400	150	270	370	100
150	100	195	210	23	400	200	330	380	105
150	150	255	220	28	400	250	390	390	114
200	80	175	235	29	400	300	420	400	117
200	100	200	240	31	400	400	560	420	158
200	150	255	250	37	500	100	215	420	107
200	200	315	260	43	500	150	275	430	132
250	80	180	265	38	500	200	330	440	138
250	100	200	270	40	500	300	450	460	172
250	150	260	280	45	500	500	650	500	246
250	200	315	290	53	600	200	340	500	197
250	250	375	300	62	600	600	770	580	345
300	80	180	295	48					

Socket tee connector MMB

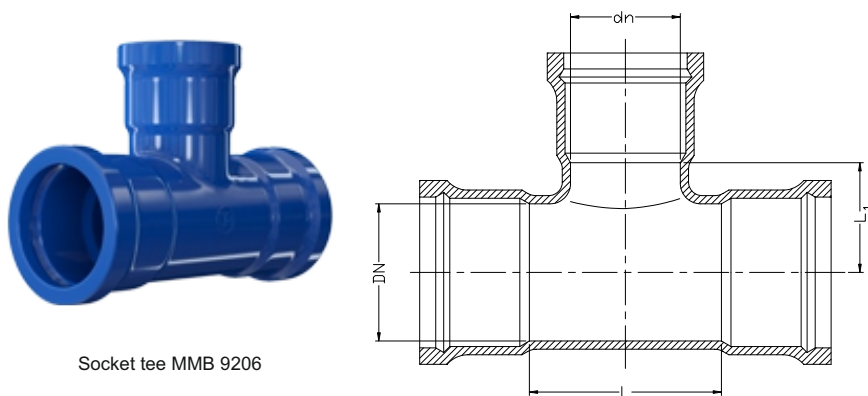PN10
PN16
WATER


Socket tee MMB 9206

Product description (standard execution):

- Made of ductile cast iron EN-GJS 500-7
- UV resistant epoxy coating EN 14901
- Product according to EN 545
- Hygienic certificate PZH for potable water
- Working pressure PN10 / PN16

Application:

In water supply systems, potable water and other chemically inert liquids

DN	dn	L	L ₁	Weight
[mm]				[kg]
80	80	170	85	12
100	100	170	95	13
100	100	190	95	14
150	80	170	120	20
150	100	195	125	21
150	150	255	125	26
200	80	175	145	26
200	100	200	145	29
200	150	255	150	34
200	200	320	160	39
250	100	200	170	45
250	150	260	175	51
250	200	320	185	57
250	250	380	190	64
300	150	260	205	66
300	200	320	205	73
300	300	440	220	99

We reserve the rights to modify the production program and the given data without separate notices due to the permanent company development