
# Cast iron flanged tee connector

PN10
PN16

WATER



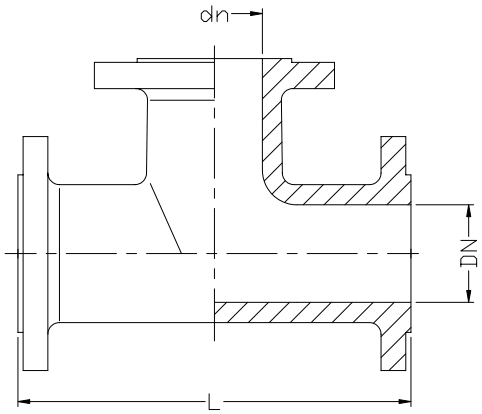


| DN | dn | L | Weight | DN | dn | L | Weight | DN | dn | L | Weight |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | [mm] | | [kg] | | [mm] | | [kg] | | [mm] | | [kg] |
| 50 | 50 | 300 | 11,5 | 250 | 80 | 700 | 65 | 450 | 100 | 460 | 190 |
| 65 | 50 | 330 | 12 | 250 | 100 | 700 | 69 | 450 | 150* | 500 | 195* |
| 65 | 65 | 330 | 12,5 | 250 | 150 | 700 | 70 | 450 | 200 | 630 | 205 |
| 80 | 50 | 330 | 14,2 | 250 | 200 | 700 | 80 | 450 | 300* | 745* | 218* |
| 80 | 65 | 330 | 14,6 | 250 | 250 | 700 | 89 | 450 | 450 | 920 | 240 |
| 80 | 80 | 330 | 15,6 | 300 | 80 | 800 | 93 | 500 | 80 | 1000 | 212 |
| 100 | 50 | 320 | 18,5 | 300 | 100 | 800 | 97 | 500 | 100 | 1000 | 215 |
| 100 | 65 | 330/360 | 20 | 300 | 150 | 800 | 98 | 500 | 150 | 1000 | 255 |
| 100 | 80 | 330/360 | 18,4 | 300 | 200 | 800 | 101 | 500 | 200 | 1000 | 262 |
| 100 | 100 | 360 | 19,3 | 300 | 250 | 800 | 106 | 500 | 250 | 1000 | 270 |
| 125 | 80 | 400 | 23,1 | 300 | 300 | 800 | 125 | 500 | 300 | 1000 | 274 |
| 125 | 100 | 400 | 23,5 | 350 | 150* | 530* | 123* | 500 | 400 | 1000 | 285 |
| 125 | 125 | 400 | 25,5 | 350 | 200 | 585 | 129 | 500 | 500 | 1000 | 300 |
| 150 | 50* | 440/325/340* | 29,5* | 350 | 250* | 645* | 135* | 600 | 80 | 580 | 304 |
| 150 | 80 | 440 | 28,5 | 350 | 300 | 700 | 141 | 600 | 200 | 700 | 307 |
| 150 | 100 | 440 | 29,5 | 350 | 350 | 850 | 167 | 600 | 400 | 930 | 323 |
| 150 | 125 | 440 | 34 | 400 | 80* | 900 | 159* | 600 | 600 | 1100 | 350 |
| 150 | 150 | 440 | 32,5 | 400 | 100* | 900 | 161* | 800 | 200 | 690 | 350 |
| 200 | 80 | 520 | 43,5 | 400 | 150* | 900 | 163* | 800 | 400 | 910 | 430 |
| 200 | 100 | 520 | 44,5 | 400 | 200 | 900 | 169 | 800 | 800 | 1350 | 630 |
| 200 | 125 | 440/520 | 45 | 400 | 250* | 900 | 175* | 1000 | 400 | 990 | 650 |
| 200 | 150 | 520 | 45,5 | 400 | 300* | 900 | 179* | 1000 | 600 | 1650 | 990 |
| 200 | 200 | 520 | 49 | 400 | 350* | 900 | 185* | - | - | - | - |
| - | - | - | - | 400 | 400 | 900 | 198 | - | - | - | - |

* - on request

## Product description (standard execution):

- Made of ductile cast iron EN-GJS 500-7
- UV resistant epoxy coating, to EN 14901
- Flange connection according to EN 1092-2 (DIN 2501), pressure PN10, PN16
- Product according to EN 545
- Hygienic certificate PZH for potable water
- Working pressure PN10 / PN16

## Application:

In water supply systems, potable water and other chemically inert liquids

We reserve the rights to modify the production program and the given data without separate notices due to the permanent company development