
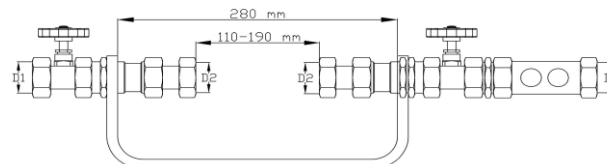


Water meter bracket
with straight and oblique globe valve

PN16
WATER


DN	Indeks	D1	D2
15	TH-1026-0015-4	3/4"	3/4"
20	TH-1026-0020-4	1"	1"

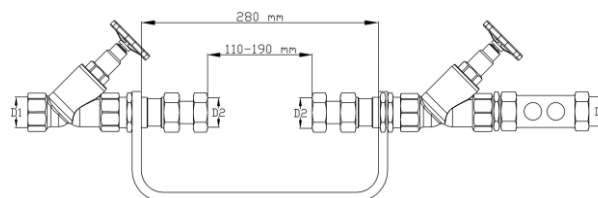

DN	Indeks	D1	D2
15	TH-1027-0015-4	3/4"	3/4"
20	TH-1027-0020-4	1"	1"


Product description (standard execution):

- Water meter installation length: 110-190 mm
- Possibility to install a water meter for water supply connection in accordance with applicable standards
- Suitable water meters assembling
- Antipollution check valves equipment
- Epoxy coating anticorrosion protection


Application:

Water lines networks: potable water with working pressure 1.6 MPa and temp. up to +70°C.

Globe valve
brass straight, brass oblique

PN16
WATER


Indeks	G	L	H	D
TH-1101-0015-4	15	52	60	50
TH-1101-0020-4	20	60	67	50
TH-1101-0025-4	25	72	82	60



Indeks	G	L	H	D
TH-1106-0020-4	20	61	65	50
TH-1106-0025-4	25	74	86	70

Product description (standard execution):

- Body and head made of brass – corrosion resistant
- Brass seat with EPDM closing device
- Bigger flow for oblique type
- Easy head disassembling
- Longer durability comparing to ball valve

Application:

Water lines networks: potable water with working pressure 1.6 MPa and temp. up to +70°C.